

# Performance Data Sheet

## Whirlpool® Model WPINL30 Water Filter System

### Performance Claims for WPINL30

Substance	NSF Required Influent Challenge Concentration	NSF Minimum Percent Reduction/ Allowable Level	Average Influent	Avg./Max. Effluent	Avg./Min. Percent Reduction
Chlorine Taste and Odor	2.0 ± 10% mg/L <sup>1</sup>	1 mg/L <sup>1</sup>	2.0mg/L <sup>1</sup>	0.08/0.09 mg/L <sup>1</sup>	95.8/91.1

Pressure Range.....30-125 psig (200-862 kPa)

Temperature Range.....40-100°F (4-38°C)

Service Flow Rate.....0.5 GPM (1.9 LPM)

Service Life.....2,500 Gallons (9,460 Liters)

<sup>1</sup> mg/L means Milligrams Per Liter, which is equivalent to parts per million (PPM).

#### Installation Requirements

Do not use where water is microbiologically unsafe or of unknown quality, without adequate disinfection before or after the system. System is to be supplied with only cold water. System and installation shall comply with applicable state and local regulations. Filter should be flushed for 15 minutes prior to first use.

#### Maintenance

Expected life of this filter is five years. Filter may need to be changed sooner due to sediment in your water source. For replacement filters call 1-866-986-3223 for the nearest store location.

#### 90 Day Warranty

Warrantor guarantees to the original owner, that the Inline Water Filter when installed and maintained in accordance with the instructions, will be free from defects in materials and workmanship for a period of 90 days from the date of installation. During the 90 days if the product proves, after inspection, to be defective, Warrantor will replace the part without charge except installations charges. Labor and shipping costs to maintain the equipment are not part of the warranty.

TO OBTAIN WARRANTY PARTS, SIMPLY CALL 1-866-986-3223 for assistance. This warranty applies only while this product is in use in the United States or Canada. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

**Water Channel Partners**  
2805 Dodd Road, Suite 300  
Eagan, MN 55121



System tested and certified by NSF International against NSF/ANSI Standard 42 for Chlorine Taste and Odor Reduction. System tested and certified to CSA B483.1.

10/14/24 (Rev. A)

7402091

# Optional: Installation Instructions / En option : Instructions d'installation


## Connect Adapter Fitting:

1. Push the included metal brass adapter through the filter collet end of the filter all the way in, until it stops. Full engagement is 11/16" past the collet. See left diagram below.
2. Tighten each nut while using a second wrench to hold the corresponding fitting.


## Connectez le raccord d'adaptateur :

1. Poussez l'adaptateur en laiton métallique inclus à travers l'extrémité de la pince de serrage du filtre jusqu'à ce qu'il s'arrête. L'engagement complet est de 11/16 po au-delà du collar. Voir le schéma de gauche ci-dessous..
2. Serrez chaque écrou tout en utilisant une deuxième clé pour maintenir le raccord correspondant.


### Install Adapter Fitting Installez le raccord d'adaptateur

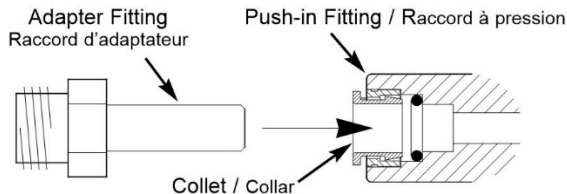

### Correct full 11/16" engagement Engagement correct de 11/16 po (17.5 mm)



### Tubing correctly cut Tube est coupé correctement



End of tubing round and smooth, with no cuts, nicks or flat spots  
L'extrémité du tube est ronde et lisse, sans coupures, entailles ou points plats

### Incorrect partial engagement Engagement partiel incorrect

